


Specification 规格:

Model 型号	SW-M324
Weigh head 头数	24
Weigh Range 称量范围	(1-200)g x 6, (1-300)g x 4, (1-500)g x 3, (1-800)g x 2
Max. Speed 最大速度	60bpm (2/3/4/5/6 mixture) 60包/分钟 (2-6种混合)
Power Supply 功率	45kW
Packing Size 包装尺寸	2630*1700*1815mm
N/G Weight 净/毛重	1100/1200kg
Weigh Bucket 称量斗	0.8L
Accuracy 精度	±0.1-1.5g
Control Panel 控制屏	10" Touch Screen 10寸触摸屏
Voltage 电压	220V 50/60Hz; 15A; Single Phase 单相电
Drive System 驱动系统	Stepper Motor (Modular Driving) 步进电机

▲ The actual performance is subject to the exact project feature.

Function 功能

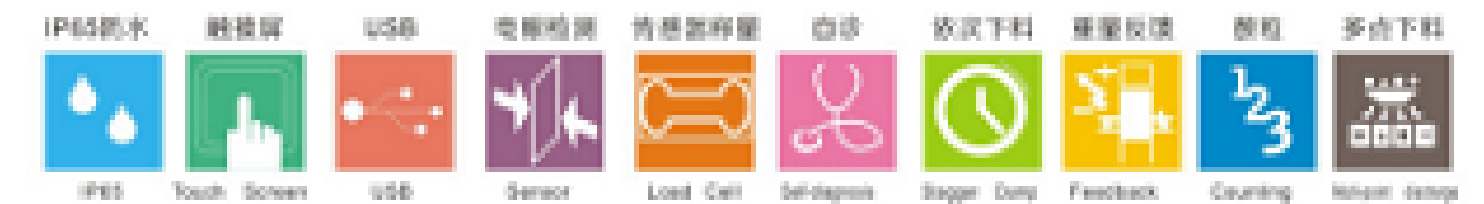

Special Feature

- \* Mixing 2-6 kinds of products for selection, with memory topper in high speed and precision;
- \* 3 weighing models available: mixture, twin & single packing;
- \* Select & check different programs on running menu without password, user friendly;
- \* One touch screen on twin weigher, easy operation;
- \* Modular control system, more stability and lower maintenance cost;
- \* Production records can be checked at anytime or download to PC;
- \* Preset stagger dump function to stop blockage;
- \* Refer to product features, select automatic or manual feeding amplitude;
- \* Food contact parts disassembling without tools, easier to clean;
- \* Multi-language touch screen for various clients, English, French, Spanish, etc;
- \* PC monitor production status, clear on production progress (Option);
- \* Optional CAN bus protocol for higher speed and stable performance.

主要特性

- \* 2-6种物料配料模式选择, 带记忆存储高速度与精度;
- \* 3种称量模式: 混料模式, 双包装模式和单包装高速度模式;
- \* 各子界面之间切换无需二次输入密码, 操作更便捷;
- \* 食品接触模式共用一个显示屏, 便于日常操作;
- \* 采用模块化系统, 性能稳定, 维护成本更低;
- \* 可输出生产记录报表, 并传至上位计算机;
- \* 防止混料食物堵塞, 可采用依次下料功能;
- \* 避免物料损耗, 可选自动慢手法调节配料模式;
- \* 食品接触件拆卸无需工具, 易于清洗维护;
- \* 多种语言界面满足不同客户需求, 如英语、法语、西班牙语, 等;
- \* 可实时监控生产情况, 掌控生产速度 (选料);
- \* 可选CAN总线通讯, 便于机器运行更快更稳定。